

Product Bulletin


PB-2018-06-09

New Launch- GOETZE PISTONS


In continuation to our new launch, we are delighted to introduce piston assembly of:

Application Suzuki Hayate EP

Cyl. Bore Dia. – 51.0 mm Engine set of Single cylinder





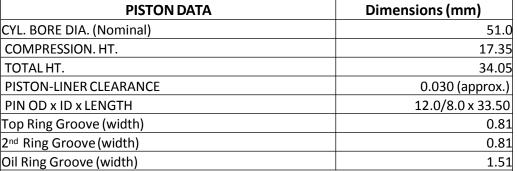

Some features& benefits:

- ■Machined Crown and As Cast Valve Pocket with special aluminum alloy for strength
- ■Thin ring grooves for better sealing of gases & oil scrapping.
- Oil holes in oil ring groove for lower oil consumption.
- Slipper Design for Better oil drainage & hence lesser oil consumption and Lesser weight & hence better fuel average.



Technical Data, Ring Set No. 2220GTX ("GTX" marking on ring top side)

Groove	Ring Feature	Ax.Ht. (mm)	End Gap (mm)
1 st , Comp.	Steel Gas Nitrided	0.8	0.10-0.25
2 nd , Comp.	KV1, Taper faced, Phos.	0.8	0.10-0.25
3 rd , Oil	3POR, Chrome Steel side rails	1.5	0.10-0.60

This product bulletin is an exclusive update of product information from Federal-Mogul. For any query or copy of bulletin, kindly contact technical service section at 0124-478 6104, E Mail- ashish.seth@federalmogul.com.

THE BEST BRANDS IN THE BUSINESS





















7th Floor, Paras Trade Centre, Sector-2, Gwal Pahari, Gurgaon. E-mail: customercare.india@federalmogul.com, Customer Care No. 011-71745745. www.federalmogul.com